ISSN 2181-9408

Scientific and technical journal





Sustainable Agriculture

№2(22).2024







Chief Editor

Salohiddinov Abdulkhakim

Vice-rector for international cooperation

Professor at "Tashkent Institute of Irrigation and Agricultural Mechanization Engineers"

National Research University, Doctor of technical sciences

Scientific Editor

Yunusov Iskandar

PhD, "Tashkent Institute of Irrigation and Agricultural Mechanization Engineers"

National Research University

Editor

Hodjaev Saidakram

Associate professor at "Tashkent Institute of Irrigation and Agricultural Mechanization Engineers"

National Research University, Doctor of technical sciences

Candidate of technical sciences

EDITORIAL TEAM:

SH.Khamraev, PhD, minister, Ministry of the Water Resources of the Republic of Uzbekistan; **H.Ishanov,** PhD, chief specialist, Cabinet Ministers of the Republic of Uzbekistan; **Dr.Prof.B.Mirzayev,** Rector of "TIIAME" NRU; **Dr.Prof.T.Sultanov,** Vice-rector for research and innovations, "TIIAME" NRU; **Dr.Prof.M.Khamidov,** "TIIAME" NRU; **Dr.Prof. A.Pulatov,** PhD, associate professor, "TIIAME" NRU; **B.Pulatov,** PhD, "TIIAME" NRU; **G.Bekmirzaev,** PhD,"TIIAME"NRU; **M.Amonov,** PhD, associate professor,"TIIAME" NRU; **Sh.Khasanov,** PhD, associate professor, "TIIAME" NRU; **M.Tursunov,** PhD, "TIIAME" NRU; **B.Sultanov,** PhD, "TIIAME" NRU; **Dr.Prof.N.Khushmatov,** Chief Scientific Secretary of the Agricultural and Food Supply Production Center; **Sh.Murodov,** PhD, "TIIAME" NRU; **Dr.Prof. O.Tursunov,** "TIIAME" NRU; **M.Juliev,** PhD, "TIIAME" NRU; **Dr.Prof. A.Karimov,** "TIIAME" NRU.

EDITORIAL COUNCIL:

Dr.Prof.N.Vatin, Peter the Great St. Petersburg Polytechnic University, (Russia); **Dr.Prof.Y.Ivanov,** Russian State Agrarian University - Moscow Timiryazev Agricultural Academy, executive director of Engineering and Land Reclamation named after A.N. Kostyakov, (Russia); **Dr.Prof.D.Kozlov,** Moscow State University of Civil Engineering – Head of the Department Hydraulics and Hydraulic Engineering Construction of the Institute of Hydraulic Engineering and Hydropower Engineering, (Russia); **D.Ziganshina,** PhD, Scientific Information Center of Interstate Commission for Water Coordination in Central Asia; **J.Lubos,** associate professor at "Department of Water Recourses and Environmental Engineering" of Slovak University of Agriculture in Nitra, (Slovak); **Acad.Dr.Prof.P.Kovalenko,** National Academy of Agricultural Sciences of Ukraine, Advisor to the Director of the Research Institute of Melioration and Water Resources, (Ukraine); **Prof.N.Xanov,** Head of the Department of Hydraulic Structures RSAU – MAA named after K.A.Timiryazev, (Russia); **Krishna Chandra Prasad Sah,** PhD, M.E., B.E. (Civil Engineering), M.A. (Sociology) Irrigation and Water Resources Specialist. Director: Chandra Engineering Consultants, Mills Area, (Janakpur, Nepal); **Dr.Prof.A.Ainabekov,** Department Mechanics and mechanical engineering, South Kazakhstan State University named after M.Auezov, (Kazakhstan); **Acad.Dr.Prof.T.Espolov,** National academy of sciences of Kazakhstan, Vice-President of NAS RK, (Kazakhstan); **I.Abdullaev,** PhD, the Regional Environmental Center for Central Asia, Executive Director; **Sh.Rakhmatullaev,** PhD, Water Management Specialist at World Bank Group; **A.Hamidov,** PhD, Leibniz Centre for Agricultural Landscape Research|ZALF, (Germany); **A.Hamidov,** PhD, Leibniz Centre for Agricultural Landscape Research|ZALF, (Germany). **A.Gafurov,** PhD, Research scientist at the department of hydrology, GFZ Potsdam (Germany). **Dr,Prof. Martin Petrick,** Justus-Liebig-Universität Gießen JLU Institute of Agricultural Policy and Market Research; **Eldiiar Duulatov,** PhD, Research Fellow, Institute of Geology, National Academy of Sciences, Kyrgyzstan; **Gisela Domej,** University of Milan-Bikokka Professor of Earth and Environmental Sciences, Italy; **Moldamuratov Jangazy Nurjanovich,** PhD, Taraz Regional University named after M.Kh. Dulati, Head of the Department of "Materials Production and Construction", Associate Professor, Kazakhstan; **Muminov Abulkosim Omankulovich,** Candidate of Geographical Sciences, Senior Lecturer, Department of Meteorology and Climatology, Faculty of Physics, National University of Tajikistan. Tajikistan; **Mirzoxonova Sitora Oltiboevna,** Candidate of Technical Sciences, Senior Lecturer, Department of Meteorology and Climatology, Faculty of Physics. National University of Tajikistan. Tajikistan; **Ismail Mondial,** Professor of Foreign Doctoral Faculty, University of Calcutta, India; **Isanova Gulnura Tolegenovna,** PhD, Associate Professor of Soil Ecology, Research Institute of Soil Science and Agrochemistry named after UUUspanov, Leading Researcher, Kazakhstan; **Komissarov Mixail,** PhD, Ufa Institute of Biology, Senior Research Fellow, Soil Science Laboratory, Russia; **Ayad M. Fadxil Al-Quraishi,** PhD, Tishk International University, Faculty of Engineering, Professor of Civil Engineering, Iraq; **Undrakh-Od Baatar,** Head of the Central Asian Soil Science Society, Professor, Mongolia; **N.Djanibekov,** Dr, External Environment for Agriculture and Policy Analysis (Agricultural Policy), Leibniz Institute of Agricultural Development in Transition Economies (IAMO) Theodor-Lieser-Str. 2 06120 Halle (Saale) Germany; **A.Karimov,** Dr, Head of the ICBA Regional representative office for Central Asia and South Caucasus.;

Designer: Dilmurod Akbarov.

Note: Only the authors of the article are responsible for the content and materials of the article. The editorial board does not respond to the content of the article!

Founder: Tashkent Institute of Irrigation and Agricultural Mechanization Engineers

Our address: 39, Kari-Niyaziy str., Tashkent 100000 Uzbekistan , www.sa.tiiame.uz

The journal "Sustainable Agriculture" is registered in the Press Agency of Uzbekistan on the 12th of February in 2018 (license № 0957).

In 2019, the journal is included in the list of recommended scientific publications by the Higher Attestation Commission of the Republic of Uzbekistan.

ARCHITECTURE. LANDSCAPE ARCHITECTURE.

Z.Kannazarova, L.Ryssalieva, S.Khamidov, K.Khamraev, G.Jaliliova, B.Najodov
Management practices for improving soil health in the Aral Sea Basin: a case study from Karakalpakstan.....5

ECONOMY. ECONOMIC SCIENCE. OTHER BRANCHES OF THE ECONOMY.

K.A.Chariev
Scientific and methodological bases of resource potential and its importance in the formation of organic agriculture in the conditions of a green economy.....9

U.Alimov, N.Omonov
Theory and strategy of the Bioeconomy: the case of Finland.....13

Kh.Khujamkulova, Z.Salomova, M.Uralova
Investments in agriculture and the efficiency of their usage.....16

M.Inoyatova
Development of organizational and economic land regulation mechanism relations in the arid zone.....19

M.Tosheva
Prospects for using the principles of "green economy" in agriculture.....23

Sh.Khamrayeva
Control innovative the development of the bioeconomic branches of the Republic of Uzbekistan.....30

K.Nosurullaev
Methodological basis of formation of agricultural insurance services in developing countries.....34

N. Abdurazakova
"Green economy" and its role in solving water and energy problems in Uzbekistan.....37

K.Shaakramov
On the issue of improving the processes of modernization the national economy.....40

E.Shodiyev, U.Matkarimov
Improving accounting of financial results in agricultural enterprises and financial analysis: evidence from Uzbekistan.....44

M.Kholikulov
The importance of investments and the organizational-economic basis of involvement in the field of fruit and vegetable sector.....47

A.Berdimurodov
The role and importance of digital technologies for innovative and sustainable development of the agricultural system of the Republic of Uzbekistan.....50

Z.S.Shokhojaeva, U.R.Sangirova
Improving the practice of subsidizing agricultural production.....53

I.Yunusov
Features and scientific-theoretical foundations of intensive development of the fish farming.....56

G. Shadmanova
Modern factors of modeling the development of production of farms and dehkan farms in Uzbekistan.....61

D.I.Mukumova,
The spatial gender equality and women's leadership in scientific activity in Uzbekistan.....63

ENVIRONMENTAL PROTECTION. WATER MANAGEMENT, HYDROLOGY.

M.Burkhonova, J.Narzullayev, B.Matyakubov
Comparison of furrow and sprinkler irrigation systems (in the example of carrot and cauliflower).....67

F.Bekchanov
Ensuring reliable operation of pump units.....71

E.Ozodov, N.Ozodova, D.Tadjiyev
Development of a multi-measuring system for control and prediction of process water resources on the arduino platform.....76

A.Djalilov, O.Nazarov
Implementation of intelligent control systems in water supply networks.....80

Kh.I.Muradov, A.U.Djalilov
Aquatic Elevation Tracking Mechanism.....84

Sh.Shoergashova, T.Liu, N.Ibrokhimova, B.Karimov
Land use impact on water quality of the zarafshan river basin.....88

HIGHER EDUCATION. PEDAGOGY.

S.Surmanov
A comparative analysis of reading skill development through graded readers.....92

O.Yoqubov
Implementing interactive learning methods requirements of time.....95

N.Yuldashova
English proficiency for advancing agricultural development.....98

M.Ziyadulloyeva
Enhancing agricultural development through teaching agricultural terms in English.....101

D.Madalieva
Study of the emergence of the concept of accounting in linguistic research.....104

POWER ENGINEERING, ELECTRICAL ENGINEERING, AUTOMATICS. COMPUTING TECHNOLOGY.

M.Ismailov, O.Ismailov, X.Temirova
Processing of blood cell images hybrid methods of acute lymphoblastic diagnosis CNN features.....106

M.Ismailov, O.Ismailov, X.Temirova
Dental Radiography Analysis Using YOLOv8 Deep Learning Using Raspbbery pi Device.....110

F.Kucharov, M.Begmatov
Electromagnetic consumer sensor.....113

S.R. Umarov, T.M.Bayzakov, Sh.B. Yusupov, A. Abduraxmonov, I. Kholmirzaev, S.Qurbonazarov
In greenhouses vegetable crops of seedlings cultivation electrotechnology effectiveness of assessment (sweet pepper plant on the example).....115

AQUATIC ELEVATION TRACKING MECHANISM

Kh.I.Muradov – PhD student, "Tashkent Institute of Irrigation and Agricultural Mechanization Engineers" National Research University

A.U.Djalilov – Phd, associate professor, "Tashkent Institute of Irrigation and Agricultural Mechanization Engineers" National Research University

Abstract

This research prioritizes the development of a system for monitoring water levels, specifically designed for agricultural water storage tanks that enable crop irrigation. Should the agricultural sector face a water crisis, such as a supply disruption, the importance of enhanced tank water level monitoring will be paramount. A water level monitoring system providing precise quantity data will equip farmers to make informed decisions, aware of the exact water availability for storage and use. The system's true benefit is its capacity to deliver farmers real-time visibility into their tank water levels, informing agricultural water use strategies. Leveraging Internet of Things (IoT) technology, the Blynk application offers a platform for comprehensive water level and consumption pattern tracking. The study's results validate the successful development of a water level monitoring solution, as evidenced by its precise tracking of tank water levels. Results analysis confirms the system's effectiveness in monitoring water levels, and the Blynk app's success in real-time level display and alerting users when levels reach a predetermined low threshold.

Keywords: *water, LED, Arduino, water level, Blynk app, water level monitoring, block diagram.*

Introduction. Accurate, affordable, and dependable level measurement technology is crucial in today's world to ensure the smooth operation and success of various systems. In industries like biochemistry, transportation, flood warning systems, and basic home water management, level measurement plays a key role. There are numerous types of level control, with overflow prevention to avoid exceeding a storage tank's maximum capacity and fully drain controls to prevent pumps from running dry being among the most common. Agricultural technology encompasses the instruments and machinery primarily or exclusively used to support farming operations. Examples include plows, threshers, and irrigation systems, many of which have a long history in agriculture and have undergone continuous reinvention and redesign. For instance, plows originally relied on animal power but are now typically motorized. Agricultural water sources are diverse, ranging from surface water like rivers, streams, and irrigation canals, to impounded water from ponds and lakes.

The primary goal of this project is to create a Water Level Monitoring System for contemporary agriculture, enabling the monitoring of water levels without the need to open the water tank. This system will be developed using an Arduino Nano to automatically display the water level on user devices via the Blynk app. Additionally, the project aims to assess the system's effectiveness in providing precise water level readings in the tank.

Methodology

In this section, we will discuss the planning framework that can be used to create a work plan for the topic at hand. It includes all the details about the sensors and components, ranging from the microcontroller to the type of Wi-Fi module. Additionally, we will explore the methods used to achieve the objectives of this project. The main focus of this chapter is on designing a water monitoring system powered by the Arduino Nano microcontroller. We will also discuss the application of IoT technology, which involves transmitting water level data from the water tank and displaying it on the user's device using the Blynk application.

Block diagram

This section will provide a detailed discussion on the project design, preparation of components, software application, and project flow. Figure 1 shows the block diagram of the project design, which is use Arduino Nano as a micro-controller and ESP8266 like a Wi-Fi module. The main purpose of this setup is to transfer data from the Ultrasonic sensor to the Blynk Application.

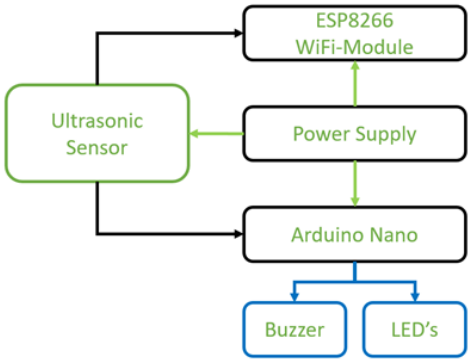


Figure 1. Project of the block diagram

In Figure 2 flowchart shows that the steps involved in the Water Level Monitoring System. The process starts from the Ultrasonic Sensor measuring the distance between the water surface and the sensor. Then this data is transmitted to the Arduino Nano, which calculates the water level by using a specific formula. If the water tank level should be low, both the buzzer and LED will be turned on immediately. Simultaneously, the information will be sent to the Wi-Fi module which is called NodeMCU (ESP 8266). Finally, the user's smartphone will receive all the information through the Blynk application.

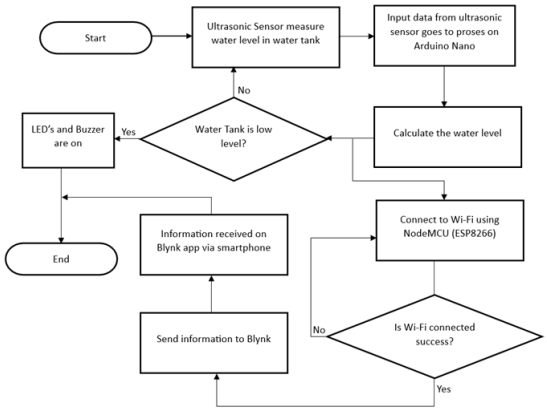


Figure 2. Flowchart Aquatic Elevation Tracking Mechanism

Development of hardware

To create the Water Level Monitoring System, we utilized several high-performance components that were cost-effective. These components were carefully selected to meet the objectives of the project and contribute to the development of an Internet of Things (IoT) platform for water level monitoring. Each part or component chosen has its own unique advantages [1,3] The unit of each component used in this project is presented in Table 1.

Table 1.

Components

Name of component	Unit
Arduino Nano	1
Ultrasonic Sensor (HC-SR04)	1
NodeMCU (ESP8266)	1
Buzzer	1
Resistor 330 Om	5
LED	5
Voltage regulator 3.3 V (LD1117)	1

Development of software

The software used for this project includes the Arduino Software IDE for uploading the Arduino program to the Arduino board, as well as the Blynk IoT platform for monitoring real-time data on the Blynk application. Blynk allows users to create a digital dashboard and interface based on the project's function, and is compatible with microcontrollers like Node MCU ESP8266. The Blynk application has three main components: controlling and displaying data on widgets, a cloud service for communication between smartphones and projects, and libraries with widgets for sending sensor data to a mobile application.

Measurement of parameter

For this project, the software utilized consists of the Arduino Software IDE for uploading the Arduino program onto the Arduino board. Additionally, the Blynk IoT platform is employed to monitor real-time data through the Blynk application. Blynk enables users to create a digital dashboard and interface tailored to the project's purpose, and it is compatible with microcontrollers such as Node MCU ESP8266. The Blynk application comprises three primary elements: widget control and data display, a cloud service facilitating communication between smartphones and projects, and libraries featuring widgets for transmitting sensor data to a mobile application.

- height

The Actual Height can be determined as the distance between the ultrasonic sensor and the water level in the water tank. This Actual Height is represented mathematically as Eq.1.

$$h=(R_max)-D \qquad \text{Eq.1}$$

- Volume of cylinder

The volume of a cylinder water tank is determined by its shape. The volume can be calculated using mathematical equation Eq.2.

$$V=\pi*(r\hat{}2\ )*h \qquad \text{Eq.2}$$

- To obtain water in liters

To convert the value from the volume of a cylindrical shape to liters, use the following formula. The volume in liters is represented by Eq.3.

$$L=V/1000 \qquad \text{Eq.3}$$

- Percentage Error

In these studies, Eq.4 demonstrates the Percent Error equation used to analyze the error in the water level monitoring system. This equation involves measurements and manual calculations to determine the Percent Error.

$$\%error=|m-c|/c\times100\% \qquad \text{Eq.4}$$

Here,
h – Actual height
D – Distance
V – Volume of cylinder
π – Pi
r – Radius
L – Liters
m – Measured
c – Manual calculation

Results and Discussion

In this section, the experimental results and progress of the project development for the Water Level Monitoring System are analyzed. The methodology implemented in each phase of the project has led to the achievement of the desired outcomes. The hardware results show that the Water Level Monitoring System can operate smoothly at four different distance stages, with LED indicators and buzzers functioning properly. Additionally, the Blynk application is able to display the water level in the tank in real time, providing measurements in liters and sending notifications if the water level is low.

Results of hardware testing and Blynk application

The Blynk application is designed to display the water level in a water tank and provide real-time monitoring with measurements in liters. Additionally, the Water Level Monitoring system includes 5 LED indicators that display the water level. These LED indicators have two colors: green and red. The green LED indicates a good water level condition, while the red LED indicates a low water level condition. The behavior of the LED indicators is determined by four distance stages: distance ⩽ 80, distance ⩽ 60, distance ⩽ 40, and distance ⩽ 20. Table 2 provides a breakdown of the LED indicators and their corresponding stages for indicating the water level in the tank.

Table 2.

The LED indicator has various stages.

LED Indicator	Blynk app	LED Indicator	Blynk app
			
			

Real-time monitoring and calculation produce the outcome.

The water level monitoring systems use ultrasonic measurement for accuracy in measuring tank water levels. The ultrasonic sensor is crucial for providing precise readings based on time-of-flight measurements. These sensors emit sound waves beyond human hearing range, with the transducer acting as a microphone to transmit and receive ultrasonic sound. Two experiments were

conducted using a 1000L water tank: one to measure height and distance, and the other to monitor water levels for precision using data collected from the Blynk application.

The water level monitoring system in the first experiment needs to collect 50 readings of height or distance based on the height of the water tank. The maximum height of the water tank is 1000 liters with a radius of 53.2 cm. Fig.3 displays the user interface of the Blynk application monitoring the water level condition. The initial height measurement is 104.2 cm, decreasing to 26.0 cm. Data is collected from these height measurements to record the volume of water based on the current height. Table 3 displays recorded data with various heights and values from manual calculations. The percent error is calculated to compare real-time data with manual calculations using the formula implemented in the water level monitoring system.

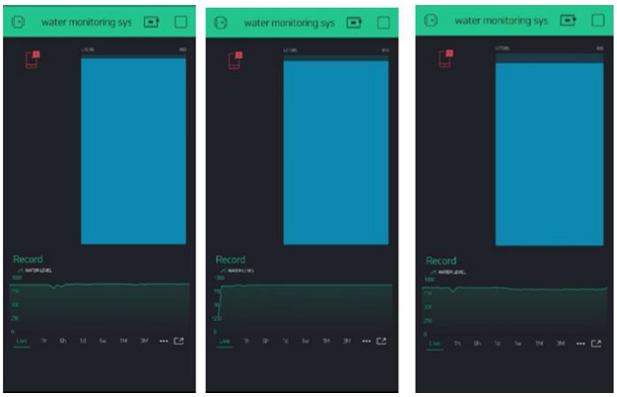


Figure 3. The user interface of the Blynk application

Table 3.
Data from the water level monitoring system is collected.

№	Measurement (L)	Distance (cm)	Actual Height (cm)	Manual calculation (L)	%Error
1	926	0.8	104.20	926.02	0.02
2	890	4.86	100.14	889.94	0.06
3	882	5.75	99.25	882.03	0.03
47	61	98.14	6.86	60.96	0.04
48	44	100.05	4.95	43.99	0.01
49	35	101.06	3.94	35.01	0.01
50	26	102.07	2.93	26.04	0.04

The water level monitoring system produced fifty different measurements of heights and volumes of water. These measurements were obtained using formulas programmed into the controller, which can accurately measure the volume of water in liters in the tank. The controller has a maximum range of 105 cm. To measure the water level, the system utilizes ultrasonic sensors that measure the distance between the sensors and the water surface in the tank. This distance is then used to determine the actual height of the water level. Table 4 displays all the data from the experiment, including manual calculations and percent error.

Table 4.
Data from the water level monitoring system is collected.

№	Measurement (L)	Distance (cm)	Actual Height (cm)	Manual calculation (L)	%Error
1	0	64.00	0.00	0.00	0.00
2	9	59.04	4.96	8.97	0.33
3	18	54.10	9.9	17.97	0.17
4	21	52.39	12.00	21.00	0.00
5	27	48.87	15.13	27.36	0.22
6	41	41.32	22.68	41.01	0.05
7	50	36.20	27.80	50.28	0.57
8	75	22.58	41.42	74.91	0.12
9	95	10.98	53.02	95.60	0.62
10	108	3.81	60.19	108.86	0.79

Based on the manual calculation of the water tank volume, there is only a slight difference in decimal points when compared to the real-time reading. This is because manual calculations are rounded to two decimal points, while the Blynk application displays whole numbers. If the decimal value is converted to a whole number, the result will match the display value on the Blynk application. For example, in Table 3, data number 1 shows a measurement value of 926 liters on the Blynk application and 926.02 liters in the manual calculation. When the manual calculation is rounded to a whole number, it matches the display value on the Blynk application.

To assess the accuracy of the water level monitoring system, we will use the percentage error formula in this experiment. For the first measurement value, the measured value is 926 liters, while the manual calculation yields 926.02 liters. The percentage error for this data is 0.02%. Overall, the percentage error for all the data is not more than 0.07%. The largest error recorded in the water level monitoring system is 0.06% for data number 37, while all other levels range from 0.01% to 0.05%.

In the second experiment, we tested the water level monitoring system to measure an actual water level and assess its accuracy in collecting data from the Blynk application. The system used the same source code but had a different specification for the water tank or storage. We collected 10 different data sets based on the water level in the storage. Each data set consisted of 5 readings that were recorded for the purpose of this study.

Table 5.
The average of five readings from the Blynk application.

№	Reading 1	Reading 2	Reading 3	Reading 4	Reading 5	Average
1.	0	0	-5	0	0	-1
2.	9	9	9	9	9	9
3.	18	18	18	18	18	18
4.	21	21	21	21	21	21
5.	27	27	27	27	27	27
6.	41	41	41	41	41	41
7.	50	50	50	50	50	50
8.	75	75	75	75	75	75
9.	95	94	95	95	94	94.6
10.	108	108	108	110	108	108.4

During this experiment, various data values were observed, resulting in different patterns of the LED indicator. For instance, when the water level monitoring sensor detects low water levels, two red LEDs and a buzzer are activated, and a warning notification is sent to the user's smartphone. Figure 4 displays the LED indicator and notification as seen on the Blynk application.

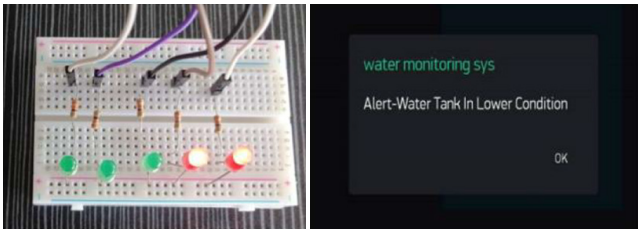


Figure 5. LED indicator and notifications from the Blynk application

In this section, the values obtained from the water level monitoring system are displayed. Each level will be measured five times and all the data will be recorded in a single table. Table 5 presents the complete dataset, which is used to analyze the values in the Blynk application. The average of the five readings taken and recorded is calculated for each value in order to conduct these studies.

During the experiment, five readings were taken and the average value of all the data was calculated. All the

readings were consistent except for three instances. In the first data point, there was a difference in the third reading, which showed a value of -5L. In the ninth data point, the water level was 95L during the high condition, but during the second and fifth readings, it showed a value of 94L. Lastly, in the fourth reading during the high condition, the value displayed was 110L. Equation 4.5 was used to calculate the average value of all the data. Only three data points were affected by having different readings compared to the other five readings. The average values for data points one, nine, and ten were 1L, 94L, and 108.4L respectively. These variations were caused by water waves in the water storage, which interrupted the readings of the ultrasonic sensor. However, this effect is minor and the water level monitoring system will provide accurate values on the Blynk application.

Conclusion

This project focuses on a Water Level Monitoring System powered by the Blynk application. The system provides information about the water level in a water tank through LED indicators, a buzzer, and the Blynk smartphone app. The monitoring system has been successfully developed to monitor water levels accurately. However, the analysis shows that there is some instability in the precision of the system, as indicated by percent error and average readings. To improve accuracy, further research can be done to explore different design options, such as using different level detection methods and displaying water volume in liters with two or three decimal places. This would enhance the system's ability to accurately measure water levels.

References:

1. Nurmatova F. B., Raphael D. S. J., ugli Muradov K. I. DIGITALIZATION AND RENEWABLE ENERGY ADVANCEMENTS AND OPPORTUNITIES. – 2023

2. Gan M. et al. An improved machine learning-based model to predict estuarine water levels //Ocean Modelling. – 2024. – С. 102376.

3. Intelligent Arduino-based system for tracking water levels / Kh. Muradov, A. Djalilov, F. Nurmatova, S. Abdimavlanova // Интернаука. – 2024. – No. 11-3(328). – P. 45-49. – EDN LDGYLS.